

Declaration

To: Mafi Europe
P.O. Box 275
SE-792 24 MORA

We hereby confirm that the usage of your multi clamp MAFI 91230 in Appendix 2, in combination with JA solar modules (JAM72S30/MR, JAM72S10/MR, JAM54S30/MR, JAM54S3 /MR, JAM60S20/MR, JAM60S21/MR, JAM54D40/LB, JAM54D41/LB, JAM60D40/LB, JAM60D41/LB, JAM60D42/LB, JAM66D42/MB, JAM66D45/LB, JAM66D46/LB JAM72D40/LB, JAM72D40/MB, JAM72D42/LB) is approved if the panels are fixed at the correct position and comply with the mechanical load specified in JA SOLAR's installation manual.

The PV system must be designed in compliance with the industry standard of photovoltaic system and must always take module specifications into considerations. System designers and installers are solely responsible for system design and installation. JA Solar assume no responsibility for any damage which is caused by a mounting system or related components.

Appendix 1



1.JA Solar PV
Single-glass Module



2.JA Solar Bifacial
Mono Module Stand

Shanghai JA Solar PV Technology Co. Ltd.
Mar 25, 2025




Appendix 2

Rev B

1 (2)

MAFI 91230 Multi Clamp

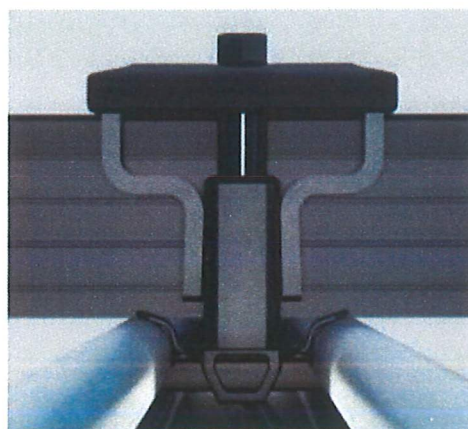

About the Product

The Multi Clamp is designed to fasten solar panels to the Solar Rail using HEX Locker 8 mm. It has a clamping zone of 50 mm to meet the requirement of some solar panel manufacturers and all parts are in black coating for optimal aesthetics. The Multi Clamp is IP-protected.

Flexibility

One clamp fits all, the Multi Clamp is designed to be used as both end and middle clamp and it fits all panels with a frame height of 28-45 mm. The Multi Clamp is easy to slide along the Solar Rail and it is designed to prevent any damage to cables or MC4 contacts inside.

How to Order



To order, please contact MAFI quoting article number.

MAFI 91230

Please visit <https://www.mafisolar.com> for regional contact information.

© 2025 MAFI Group. All rights reserved.

Measurements in millimeters

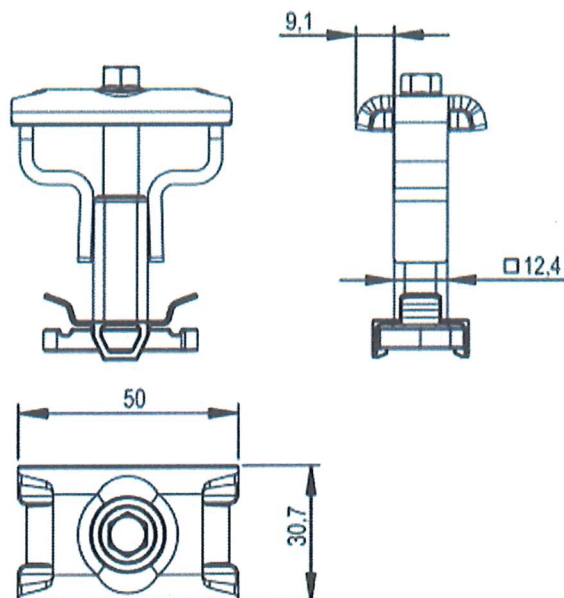

Parts list

Part	Material	Quantity	Weight (g)
Panel Clamp Bushing Nut	10B21	1	41
Panel Clamp Head Cap	S355MC	1	59
Panel Clamp Clip	Polyamide	1	0.6
Flange bolt M8 x 40H	8.8 HDG	1	15
Lock washer for M8 bolt M8 x 40H	TPU	1	2.2
Lock washer for M8 bolt M8 x 40H	PA6	1	0.4
Total:			118.2

Info

Maximum torque: 6 Nm

Tool: We recommend using HEX Locker 8 mm



91230